


CLEVEREDGE PRO

Rectilinear Luminaire



DESCRIPTION

Cleveredge Pro is an indoor rated rectilinear luminaire for general lighting applications. With a "back-to-basics" design utilizing suspension mounting, Cleveredge is well suited as a modest statement-piece for conference rooms, restaurants, hospitality venues, and more. Its name is the first indication of its "clever" design, having a multitude of finish options for the trim surrounding the edge-lit LED board: finishes range from painted RAL colors to specialized wood, marble, or concrete textured finishes. Luminaire is available in three sizes, all complemented with power and CCT selectability using a rear-mounted switch. Also available is a field-installed emergency battery backup for 90-minute minimum runtime.

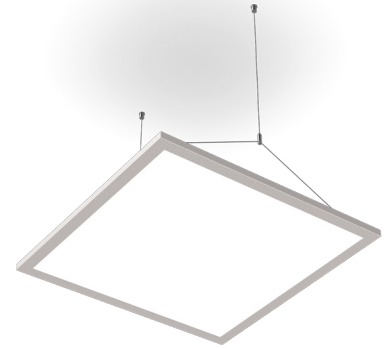

Date: _____ Type: _____ Catalog Number: _____

Project Name: _____

ORDERING INFORMATION

LUMINAIRE								
MODEL	SIZE	POWER	CCT	CONTROL	VOLTAGE	MOUNTING	FINISH	OPTION
CLVR Cleveredge Pro	1X4 1' x 4'	SW Power Selectable	SK CCT Selectable 35/40/50K	DIM 0-10V Dimming	UNV 100-277V	SS Suspended Surface	BL Black	EM Emergency Battery Backup: Field Installed
	2X2 2' x 2'						SL Silver	
	2X4 2' x 4'						XX Choose a finish from swatch below. ¹	
							CC Custom RAL Color	

Custom solutions are available; consult factory for assistance via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.

¹Note: Textured finishes have extended lead time.



BL
Black
RAL 9005



SL
Silver
RAL 9006



C1
Concrete
Style 1



C2
Concrete
Style 2



C3
Concrete
Style 3



C4
Concrete
Style 4



M1
Marble
Style 1



M2
Marble
Style 2



M3
Marble
Style 3



M4
Marble
Style 4



W1
Wood
Style 1



W2
Wood
Style 2



W3
Wood
Style 3



W4
Wood
Style 4

CLEVEREDGE PRO

Rectilinear Luminaire



		1x4'	2x2'	2x4'
PHYSICAL	HOUSING	Ultra-Slim Steel Frame		
	LENS	Translucent Polycarbonate Diffuser		
	DIMENSIONS	50.1" L x 14.1" W x 1" H	26.1" L x 26.1" W x 1" H	50.1" L x 26.1" W x 1" H
	OPERATING TEMPERATURE	-4°F to 113°F		
	WEIGHT	8.2 Pounds	7.8 Pounds	13.8 Pounds
	FACTORY PRESETS	4000K and 40 Watts		

ELECTRICAL	POWER (field selectable)	Field Selectable 20/30/40 Watts			Field Selectable 30/40/50 Watts
	CURRENT	20 Watts	30 Watts	40 Watts	50 Watts
	VOLTAGE	Universal 100 to 277 Volts			
	DRIVER	Rear-mounted UL Listed Class-2 Constant Current Driver			
	CONTROL	0-10v Dimming			
	FREQUENCY	50/60Hz			
	POWER FACTOR	> 0.99			

PHOTOMETRIC	LED	Field-Selectable 3500K, 4000K, 5000K			
	COLOR RENDERING INDEX	> 80			
	BEAM ANGLE	110°			
	DELIVERED LUMEN OUTPUT (±5%) <small>Note: Values based on 120 LPW</small>	20 Watts	30 Watts	40 Watts	50 Watts
		2400 Lumens	3600 Lumens	4800 Lumens	6000 Lumens
	EFFICACY	Up to 120 Lumens per Watt			
LUMEN MAINTENANCE	L70 > 50,000 Hours at 77°F*				

CERTIFICATIONS	SAFETY	UL Listed External Driver
	INGRESS PROTECTION	IP20
	WARRANTY	Five-Year Limited Warranty



* LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.

CLEVEREDGE PRO

Rectilinear Luminaire



DIMENSIONS

All dimensions are shown in inches unless otherwise noted.

